



3. Place the safety seat onto the passenger seat in forward facing position. By pulling or pushing the backrest of the safety seat in forward or rearward direction, adjust the reclining of the backrest (Ref Pic.10) and let the backrest close up to the passenger seat. (Ref Pic.11)

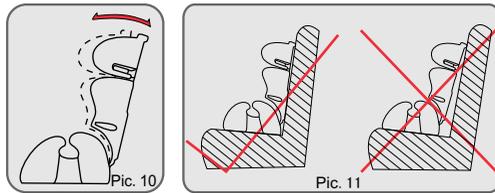


4. Place your child into the safety seat, make sure the belt no twisted or knotted. Positioning the car's lap belt under both armrests and pass over the laps of the child. Thread the shoulder belt under the armrest and then through the upper shoulder guide on the headrest. Then fix the metal inserts on the belt into the belt buckle. (Ref Pic. 12)

5. If use the safety seat as a booster in Group 2+3 without backrest, make the backrest downward 90°, then pull out it (Ref Pic. 13)

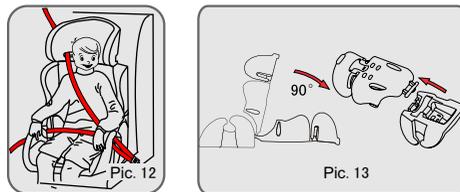

6. Fit the booster tightly onto the car seat backrest. Make sure the car belt no twisted and knotted. Then thread the lap belt and shoulder belt through the belt guide, and click them into the belt buckle. (Ref Pic. 14)



Cleaning & Maintenance

The safety seat cover is easily removable and can be cleaned by using neutral soap and cold water. Do not tumble dry, iron the cover. Do not use dry machine. Just airing it. Plastic part can be cleaned by using a wetish drapery. do not use any solvents.



Machine wash, cold water



do not bleach



Dry clean, dissolvable except trichloroethylene




Do not tumble dry



Do not iron


Notice:

1. This is a "Universal" child restraint. It is approved to Regulation No. 44, 04 series of amendments, for general use in vehicles and it will fit most, but not all, car seats.
2. A correct fit is likely if the vehicle manufacturer has declared in the vehicle handbook that the vehicle is capable of accepting a "Universal" child restraint for this age group.
3. This child restraint has been classified as "Universal" under more stringent conditions than those which applied to earlier designs which do not carry this notice.
4. If in doubt, consult either the child restraint manufacturer or the retailer.

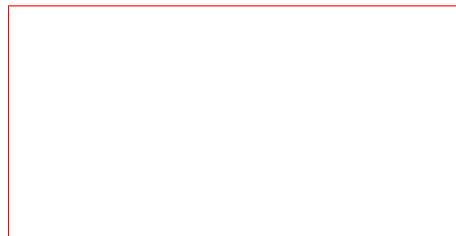

SAVILE V6

SAFETY SEAT

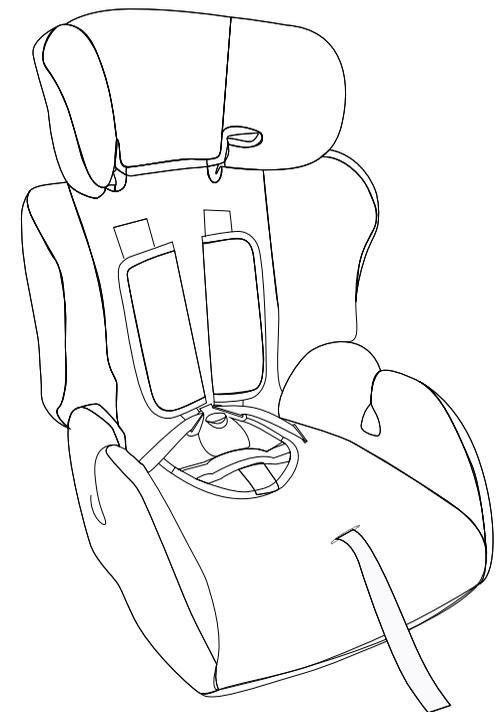

INSTRUCTION FOR BABY SAFETY SEAT

INSTRUCTION FOR USE BABY SAFETY CAR SEAT

FORWARD

Thanks for choosing this safety seat SAVILE V6 to protect your child. This seat has been manufactured to comply with the European Standard ECE44/04. It is produced under the strict quality assurance system, and passed the European strictest product authorization. But it can play its function only if it is used in the right way, otherwise there may be unexpected injury. So, please fit and use this safety seat according to this handbook. The safety seat should only be fixed in a car disposing over a 3-point safety belt system with or without unroll-device, and the belt system should comply with UN/ECE 16 or an equal regulation. According to the accidents statistics, the most safety place for installing the safety seat are rear passenger seats in your car. So we suggest you consider to fix this seat in advantage firstly.

Warning

1. Please read this manual carefully before install this safety seat. Any wrong installing may result in heavy injury. The manufacture do not assume any responsibility in this case.
2. Do not modify the safety seat or add any spare parts, otherwise the safety or function may be influenced.
3. Ensure the safety seat is secured to the car seat all the time, even when not in use. Ensure your child on the safety seat must be secured by children restraint system even not in the vehicle. Never leave your child unattended in the safety seat.
4. Do not leave any loose objects in the back seats of the car, otherwise your child may be injured by them in suddenly braking.
5. Please use new ones if your safety seat is damaged in accident.
6. The safety seat can become very hot if left in the sun, contact these parts may injure your child.
7. Do not make the buckle in half locked. The child should be released quickly in emergency.
8. Do not let the safety seat in corrosive.
9. The safety seat can not be used without its original cover. The original cover is part of the homologation.
10. The manufacture guarantees the product's quality except the secondhand ones.

Using scope

This safety seat is suitable for children from 9-36kgs. According to the different weight, there will be following categories:

Using as Group 1 (9-18kgs)

The safety seat should be used with backrest. Secure the child into safety seat with child restraint belt system, and fitting the safety seat with the car's 3 points belt system. (Ref Pic 1).


Using as Group 2+3 (15-36kgs)

The safety seat can be used with backrest. Please use the car's 3 points belt system to fitting both the safety seat and your child (Ref Pic 2a) If use the safety seat as a booster without backrest, please ref (Ref Pic.2b)




Using as group 1


1. After thread the safety seat's two shoulder belts through the shoulder belt holes on the backrest, please check whether the height of the shoulder belt is similar to your child's shoulder height. (Ref Pic 6)
2. Fitting the safety seat in forward facing position on the passenger seat which with 3-points belt system. And keeping upright and get it close up to the passenger seat then fasten it. (Ref Pic 3/Pic 4)

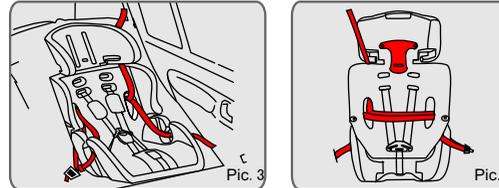


3. After the car belt system get across the backrest, attach the red clip onto the shoulder strap near the car buckle. (Ref Pic 5)



4. Press the adjuster's button at the front of booster, pull the shoulder strap to loose the child restraint belt strap.
5. Press the red button on the buckle and place the shoulder straps at the side, place your child into the safety seat, make sure the belt no twisted or knotted. Approach the two inserts and insert them into the buckle. The buckle will not work well till you hear "click". (Ref Pic.6)

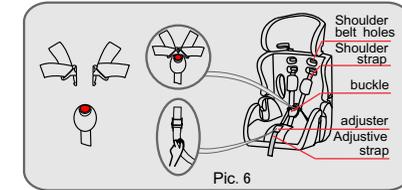


6. Tighten the shoulder straps by pulling the adjustable strap at the front of the booster. (Ref Fig 7)



7. If you want to release your child from the safety seat, press the adjuster button at the front of the booster, at the same time pull the shoulder straps. Then press the red button on the buckle, place the shoulder straps at the side and let your child out.

Using as Group 2+3

1. Unfasten the shoulder strap from yoke at the back of backrest, draw the belt system out from the holes in the backrest and booster. (Ref Pic.8)

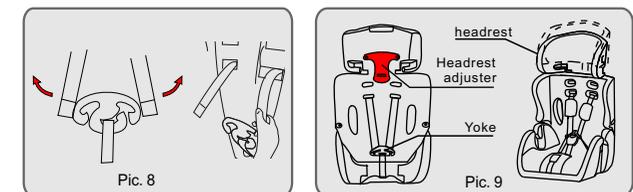

2. The height of the headrest must be adjusted according to the height of your child. The upper shoulder guide hook on the headrest must be a bit higher than the shoulder of your child. When adjusting the height, pull the red adjuster at the back of headrest, at the same time pull the headrest up or down to the suitable position. (Ref Pic.9)